


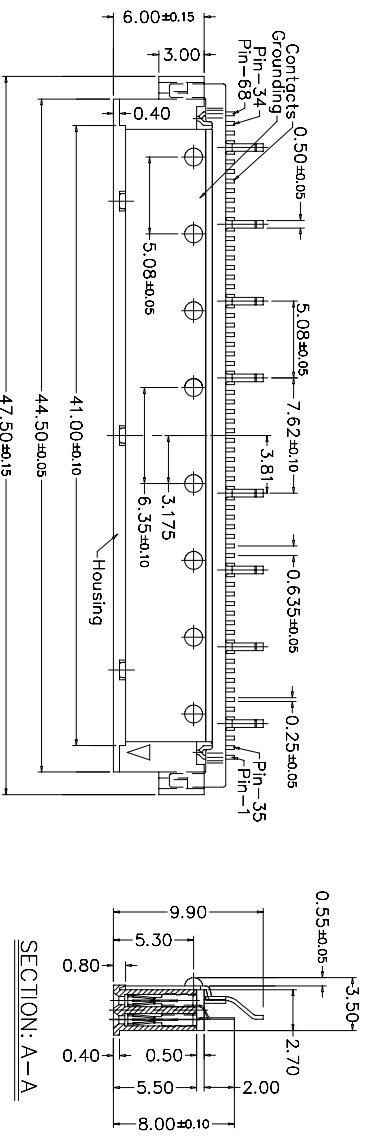

SECTION: A-A

NOTE :

1. MATERIAL:

HOUSING : HIGH TEMP. THERMOPLASTIC, UL94V-0

COLOR : BLACK

CONTACTS : COPPER ALLOY.

GROUNDING : COPPER ALLOY.

2. PLATE :

CONTACTS : 10u" MIN GOLD FLASH ON CONTACT AREA





100u" MIN TIN/LEAD PLATING AT SOLDERING TAILS.

50u" MIN. NI UNDERPLATING OVERALL.

GROUNDING : 10u" MIN GOLD FLASH ON CONTACT AREA

100u" MIN TIN/LEAD PLATING AT SOLDERING TAILS.

50u" MIN. NI UNDERPLATING OVERALL.

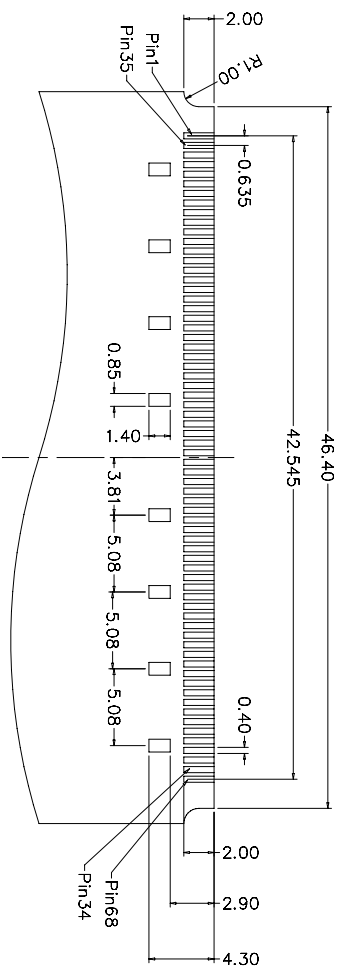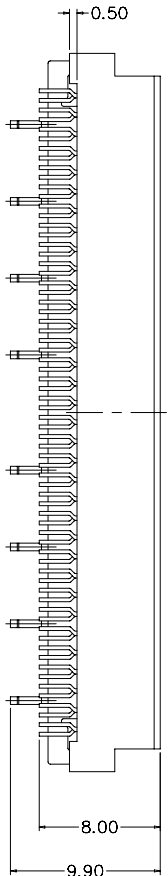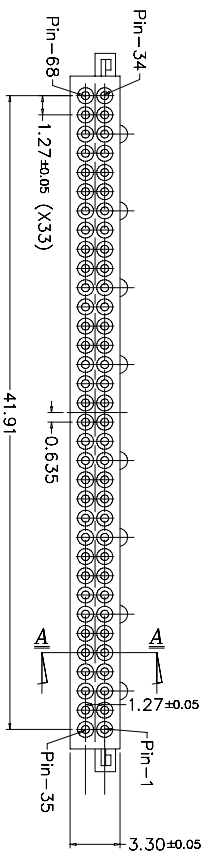

Recommended PCB Layout

— Tolerances —		BroadTek		Title :	
Unless Otherwise Specified		Technology CO., LTD.		Cardbus 68Pin Connector	
.0	±0.15	Approved:	Checked:	Drawing NO.	Part NO.
.00	±0.10	Kerwin	Jim	402-168-206-2	402-168-206-2
.000	±0.05	Engineer:	Drawn:	Unit:	Scale:
ANGLES	±1°	Angus	Rito	mm	2:1
				Size	Rev. Sheet
				A4	01