
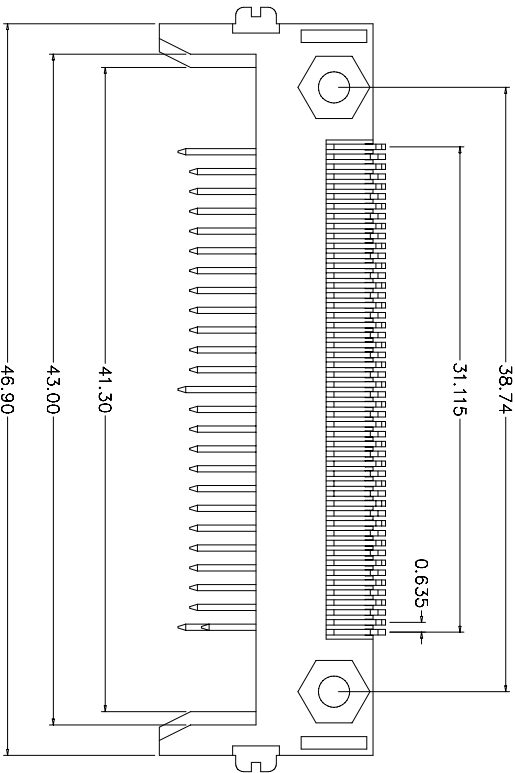



Note :

- Material :
 - Housing : High Temperature Thermoplastic
 - Contact : Copper Alloy
 - Ped : Copper Alloy
- Plating :
 - Contact Area : Gold Plated Over Ni
- Rating :
 - Current Rating : 0.5A
 - Voltage Rating : 250V RMS
 - Operating Temperature : -20°C~60°C
- Specification :
 - Contact Resistance : 40 Milliohms
 - Dielectric Withstanding Voltage : 500V AC
 - Insulation Resistance : 100Megohms
 - Insertion Force : 28.8 Max
 - Separation Force : 4.9 Min.

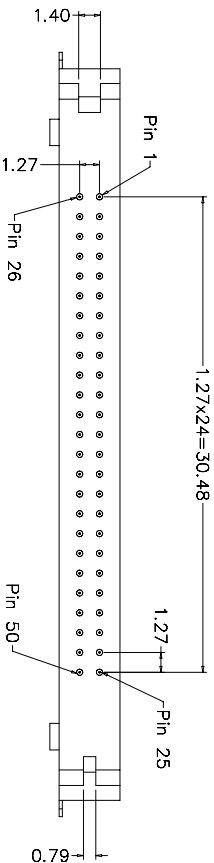

— Tolerances — Unless Otherwise Specified				Title : Compact Flash Connector			
.0	±0.15			Drawing NO.		Part NO.	
.00	±0.10			Approved:		E-415-225-111	
.000	±0.05			Checked:		E-415-225-111	
ANGLES		±1°	Engineer:	Drawn:	Unit:	Scale:	Size Rev. Sheet
					mm	2:1	A4 01