

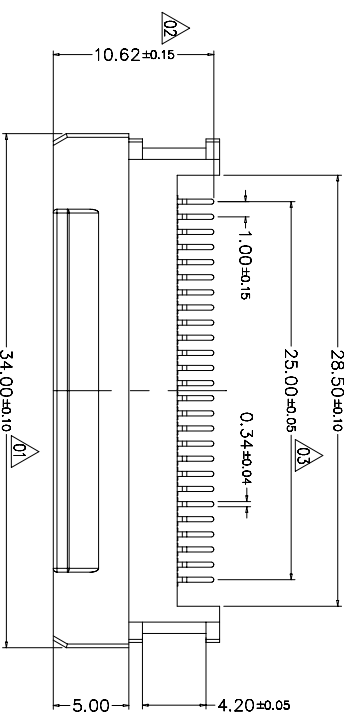
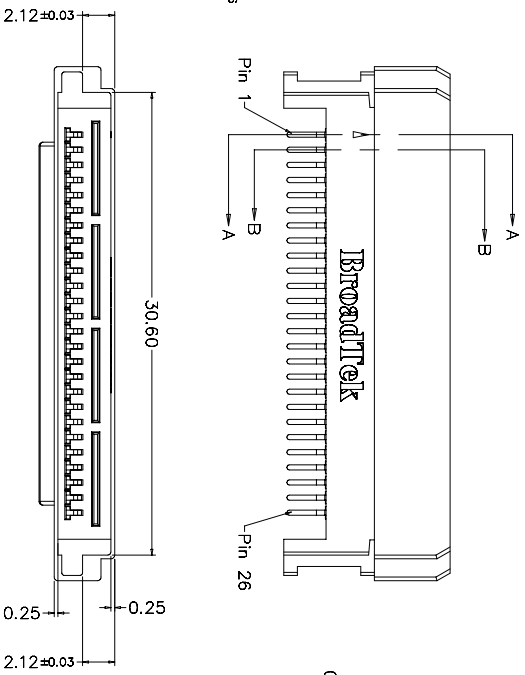
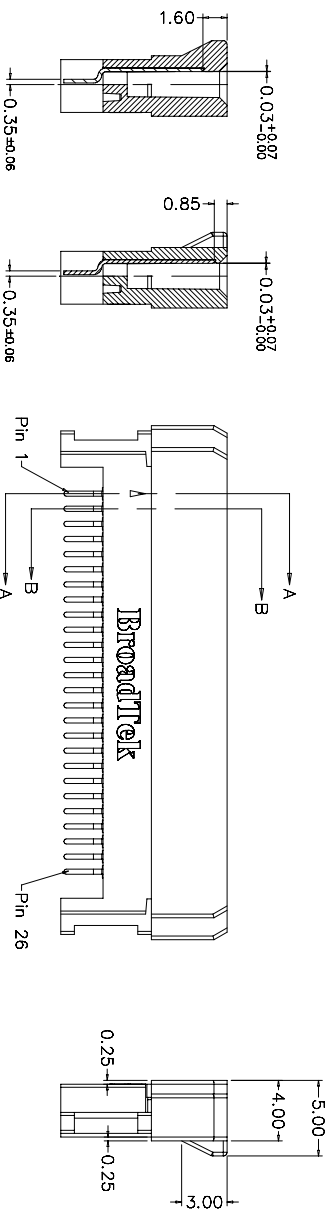


- NOTE:
- MATERIAL:
- 1 HOUSING: ENGINEERING PLASTIC, Nylon 9T, 30% GLASS FIBER FILLED, UL 94V-0 RATED, COLOR BLACK.
 - 2 CONTACT: Ph, BRONZE, PER JIS C5191R-H.
- PLATING:
- 1 CONTACT AREA: HARD GOLD PLATING OVER 15u"MIN. NICKEL UNDERPLATING.
 - 2 SOLDERING ZONE: 3.05 μm(120u")MIN. TIN, OR LEAD-FREE PLATING PER PART NUMBER DESIGNATION, OVER NICKEL UNDERPLATING.
 - 3 UNDERPLATING: 1.27 μm(50u") MIN. NICKEL ALLOYER.
 - 4 PACKAGING: TRAY PACKAGE PER PACKAGING
 - 5 USING ALL MATERIAL TO ACCORD WITH ROHS CODE.

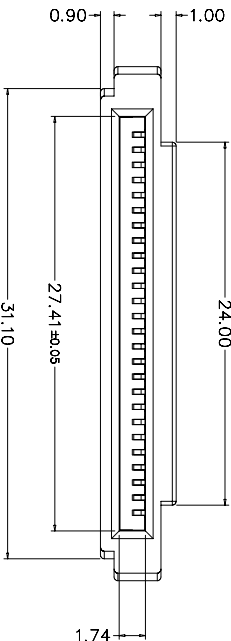

Recommended PCB Layout

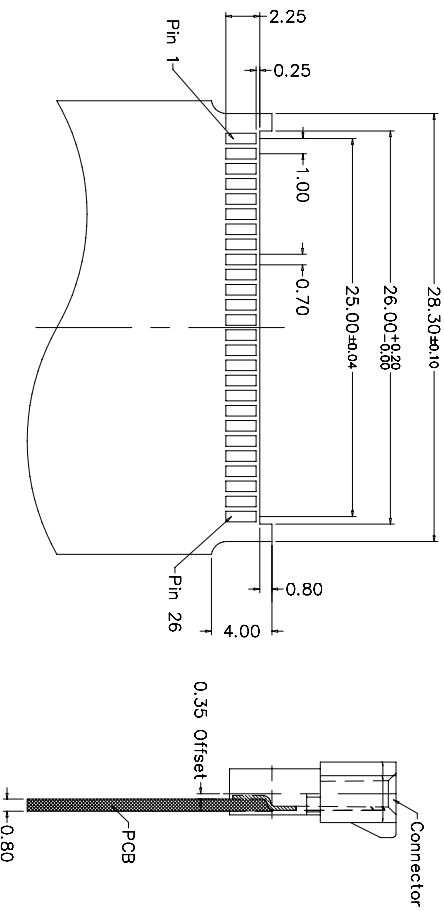

— Tolerances — Unless Otherwise Specified			Title : Express Card 26Pin Connector		
.0	±0.15	Technology CO., LTD.	Drawing NO. E-401-126-104	Part NO. E-401-126-104	Size A4
.00	±0.10				
.000	±0.05				
ANGLES	±1°	Engineer: Angus	Drawn: Rito	Unit: mm	Scale: 2:1
			Rev. Sheet		